

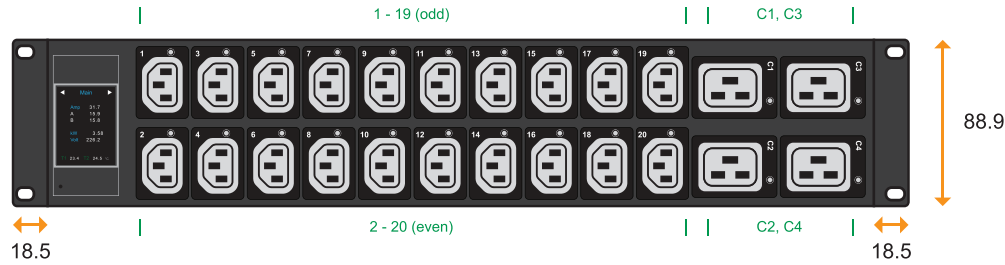


unit : mm

Front view

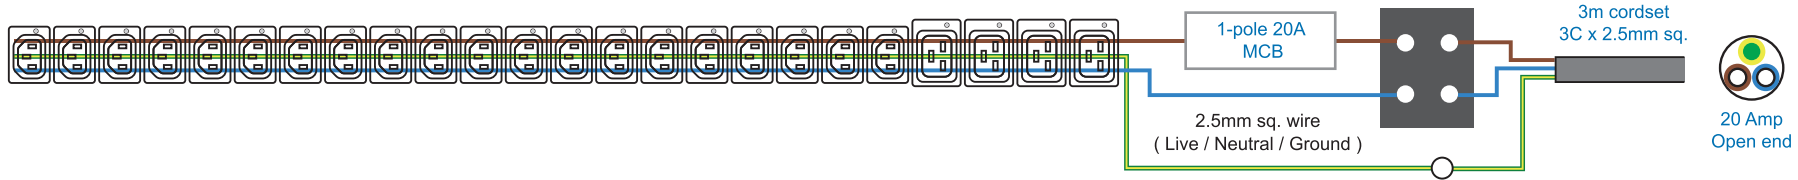

Rear view

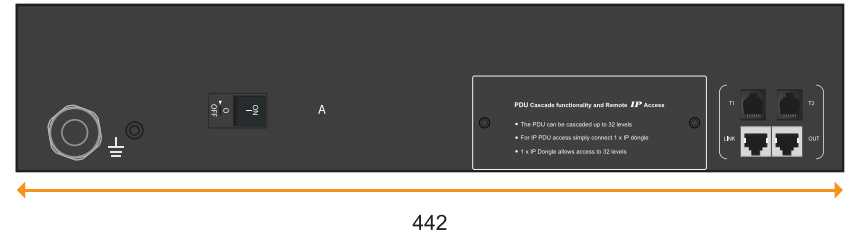

Single phase monitored PDU

Input Rating : 20A, 230V
Outlet : 10A Rated C13 x 20
16A Rated C19 x 4
Inlet : 20A open end
Cordset : 3 meter 2.5mm sq. H05V V-F cordset
Protection : 20A single pole hydraulic MCB x 1
Circuit Details : Output 20A max. C 13 #1-20 + C 19 #C 1-C 4

Meter Features (W monitored PDU)

Local Display : Field replaceable 2.0" color LCD with touchscreen
Bank Measurement : Voltage (V), Current (A), energy (kWh) & power factor
Accuracy : ±1% Billing-grade
IP Access : via IP dongle, one IP Access up to 32 PDU Levels
Cascade : Up to 32 PDU under single IP address via IP dongle
SNMP : V2 / V3 via IP dongle
Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

IP dongle (option)

- Dual LAN Network Failover
- 10/100 Ethernet & Gigabit Ethernet standard
- Enterprise IP Authentication, LDAPv3 / LDAPS, Active Directory®, RADIUS protocol

EMC Compliance : CE / EMC
Safety Compliance : CE / LVD & UKCA
Tested to EN 62368-1:2014 / A11:2017 standard
Tested to EN 60730-1:2016 / A1:2019 standard
Environment Compliance : RoHS3 & REACH

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

Chassis Material : Steel
Chassis Color : Black

Product Dimension : 442 (W) x 350 (D) x 88.9 (H) mm
Net weight : 6.5 kg

Packing Dimension : 525 (W) x 460 (D) x 130 (H) mm
PDU gross weight : 7.1 kg