


1-Phase Dual Feed Metered PDU specification drawing

230V 16A / 20A / 32A PDU : C13 x 32

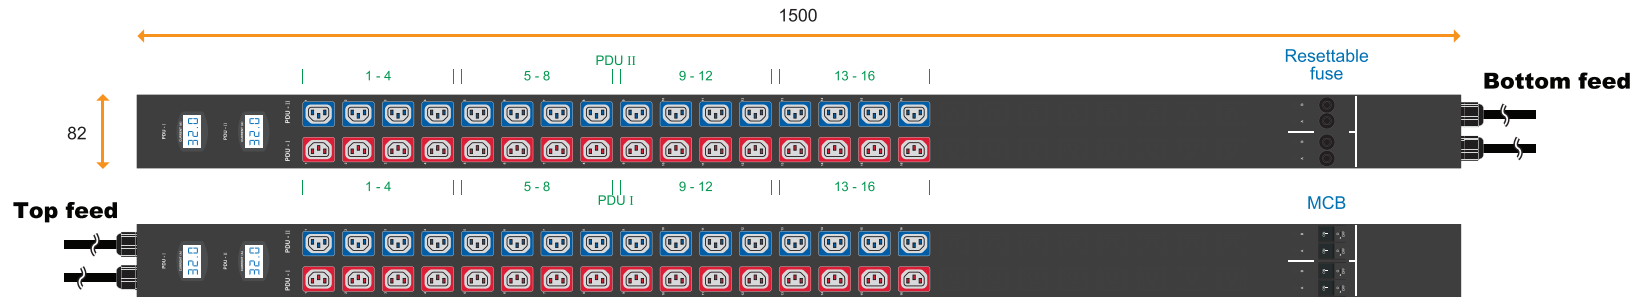

IEC 60309 Inlet

32A model :	Circuit Protection
DV32C13-32A-MD/ F _EN/3 B -1	Resettable Fuse x 4
DV32C13-32A-MD/ CR _EN/3 T -1	1-pole MCB x 4

Input Rating : 32Amp, 230V
Cordset : 3 meter 4.0mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 4
PDU I : < **Circuit A** > Output 16A max., C13 #1-8
< **Circuit B** > Output 16A max., C13 #9-16
PDU II : < **Circuit A** > Output 16A max., C13 #1-8
< **Circuit B** > Output 16A max., C13 #9-16
Weight : Net 12.5 kg / Gross 14.5 kg

Circuit Protection	Code
Fuse	F
MCB	CR



Open end

20A model :	Circuit Protection
DV32C13-20A-MD/ F _OE/3 B -1	Resettable Fuse x 2
DV32C13-20A-MD/ CR _OE/3 T -1	1-pole MCB x 2

Input Rating : 20Amp, 230V
Cordset : 3 meter 2.5mm sq. H05V V-F cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 2
PDU I : Output 20A max., C13 #1-16
PDU II : Output 20A max., C13 #1-16
Weight : Net 12.5 kg / Gross 14.5 kg

PDU Feed	Code
Bottom	B
Top	T



IEC 60309 Inlet

16A model :	Circuit Protection
DV32C13-16A-MD/ F _EN/3 B -1	Resettable Fuse x 2
DV32C13-16A-MD/ CR _EN/3 T -1	1-pole MCB x 2

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
PDU I : Output 16A max., C13 #1-16
PDU II : Output 16A max., C13 #1-16
Weight : Net 12.5 kg / Gross 14.5 kg



IEC320 C20

16A model :	Circuit Protection
DV32C13-16A-MD/ F _C20/3 B -1	Resettable Fuse x 2
DV32C13-16A-MD/ CR _C20/3 T -1	1-pole MCB x 2

Input Rating : 16Amp, 230V
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 2
PDU I : Output 16A max., C13 #1-16
PDU II : Output 16A max., C13 #1-16
Weight : Net 12.5 kg / Gross 14.5 kg

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

Meter Features (MD metered PDU)

Local Display : 3-digit LED ammeter measuring input load current
Measurement : Current (A)
Accuracy : ± (3% of the reading + 5 digits) RMS

EMC Compliance : CE / EMC
Safety Compliance : CE / LVD & UKCA
Tested to EN 62368-1:2014 / A11:2017 standard
Tested to EN 60730-1:2016 / A1:2019 standard
Environment Compliance : RoHS3 & REACH