


Type-C KVM 2x1 Switch with 3 DP&2xUSB-C Charging

Quick Installation Guide Ver. 1.0


All brand names and trademarks are properties of their respective owners

CONNECTION DIAGRAM:

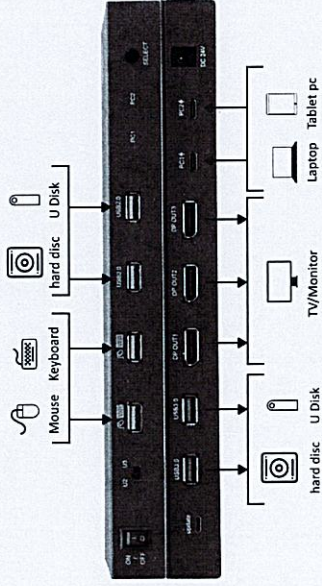

PRODUCT OVERVIEW:

Front Panel:



- ① ON/OFF:power switch
- ② Mode Select switch: Switch between 4K30Hz + USB 3.0 and 4K60Hz+ USB 2.0 when power is not connected
- ③ USB HID Port: Links to USB HID device (keyboard, mouse, etc.)
- ④ USB2.0 Port:Links to USB2.0 device (U disk printer hard disk, etc.)
- ⑤ Port Status LEDs: The LED1/LED2 will illuminate when the PC1/PC2 is selected
- ⑥ Port Selection button: Press the button to select a compute

INTRODUCTION:

The 2X1 Type-C KVM Switch with DisplayPort&USB3.0 allows two USB Type-C enabled computers to share one DisplayPort and multiple USB peripherals (four HID devices plus two USB 3.0 devices).

FEATURES:

- Supports maximum resolution of 3840 x 2160 @ 60Hz (4:4:4)
- input terminal type-c can charge the device
- Supports 3 DP outputs
- Enables Keyboard and mouse plug and play without drivers
- Has front-panel buttons/hotkey for easy computer selection and auto-scan function
- Offers selectable scan time function
- Supports Windows and Mac with no software required
- Select between 4K@60Hz + USB 2.0 and 4K@30Hz + USB 3.0
- Features front USB/USB HID design for easy access of USB device

COMPATIBILITY:


Windows, Mac, Linux Type-C-enabled computers

PACKAGE CONTENTS:

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- 1x Main unit
- 1x Power Supply Adaptor
- 1x User Manual

Back Panel:



- ⑦ update:USB Upgrade port
- ⑧ USB3.0 Port: Links to USB 3.0 device
- ⑨ 3xDP Output: Connects to DisplayPort monitor by a DP cable
- ⑩ USB Type-C port: Connects to the Type-C port of a PC and charges the device.
- ⑪ Power supply: Apply appropriate 24V power to kvm switch.

TYPICAL OUTPUT CONFIGURATION

Output resolution		Screen1 Resolution		Screen2 Resolution		Screen3 Resolution	
TYPE-C:Source resolution	3840*2160/60HZ	OFF	OFF	1920*1080P	1920*1080P	1920*1080P	3840*2160/60HZ
		1920*1080P	1920*1080P	1920*1080P	1920*1080P	1920*1080P	3840*2160/30HZ
		1920*1080P	1920*1080P	1920*1080P	1920*1080P	1920*1080P	1280*720P
		OFF	OFF	OFF	OFF	OFF	3840*2160/30HZ
		OFF	OFF	1920*1080P	1920*1080P	1920*1080P	1280*720P
		1280*720P	1280*720P	1280*720P	1280*720P	1280*720P	1280*720P

HOTKEY:

Command	Function
[Caps Lock]+ [Caps Lock]+1	Switch to PC1
[Caps Lock]+ [Caps Lock]+2	Switch to PC2
[Caps Lock]+ [Caps Lock]+←-or-↑	Switch to previous PC
[Caps Lock]+ [Caps Lock]+→-or-↓	Switch to next PC

SPECIFICATION:

Video Resolution(Maximum)	3840 x 2160 @ 60 Hz (4:4:4)
Connectors	Computer Interface: USB Type-C x 2(rare); Console Interface: USB 3.0 Port x 2(front); USB HID Port x 4(rare); Video Output: DisplayPort Pushbutton (for selection); Mode Switch;
User Controls	4K @ 60 Hz + U2 (picture oriented); 4K @ 30 Hz + U3 (USB speed oriented); Keyboard Hotkeys
Power Supply	DC 24V/3A
Dimensions	270*111*25MM
Main Weight	0.96KG