



Benefits

- ▶ 1U 17" / 19" LED-backlit LCD console drawer
- ▶ 1280 x 1024 native resolution / 16.7M colors
- ▶ 104-key USB keyboard with either touchpad or trackball
- ▶ Short depth design of 500mm
- ▶ One Man installation design
- ▶ Enhanced aesthetics with molded front handle and two point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)
- ▶ TAA Compliant

Options

- HDMI 1.4 + DVI-D + Audio in & out + Speakers (**AV4.4**)
- HDMI 1.4 + Speakers (**HDMI**)
- S-Video + Composite + Speakers (**BNC**)
- 3G / HD / SD-SDI Broadcast-grade input + Speakers (**SDI**)
- DC power : 12V / 24V / 48V / 125V / 250V
- SUN Micro keyboard option

Product Specifications

Console Port	
Video input	VGA
KB / MS	USB interface
VGA console 6ft cable : CB-6A	Drawer end : DB-15 + USB type A x 2 Server end : DB-15 + USB type A x 2

Video Option		
Digital	DVI	DVI-D single link
	HDMI	HDMI 1.4 / HDCP 1.4
Analog	S-Video (4-pin)	NTSC & PAL
	Composite (BNC)	NTSC & PAL

HDMI

N117 chassis extension in depth to 520mm (20.5")
N119 chassis extension in depth to 520mm (20.5")

S-Video & Composite

N117 chassis extension in depth to 570mm (22.4")
N119 chassis extension in depth to 570mm (22.4")

LED-backlit LCD Panel	N117	N119
Panel size (diagonal)	17"	19"
Native resolution	1280 x 1024	1280 x 1024
Brightness (cd/m ²)	250	250
Contrast ratio (typ.)	1000 : 1	1000 : 1
Colors	16.7 M	16.7 M
Viewing angle (L/R/U/D)	85/85/80/80	85/85/80/80
Response time (ms)	5	5
Dot pitch (mm)	0.264	0.294
Display area (mm)	337.92H x 270.33V	376.32H x 301.06V
Surface treatment	Haze 25%, Hard-coating	
Surface hardness	3H	
Backlight type	LED	
MTBF (hrs)	30,000	

Audio Option		
Input	Connector	3.5mm stereo jack
	Impedance / Power level	30kΩ / 750mV
Output	Connector	3.5mm stereo jack
	Resistance / Power level	30kΩ / 2.8V
Speaker	Dual stereo	2W x 2

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 22W / Max. 55W
	Power saving mode	Max. 2W / Max. 34W
	Power button off	Max. 1W / Nil

Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Physical		N117	N119
Product (W x D x H)	Single console	442 x 500 x 44 mm 17.4 x 19.7 x 1.73 inch	442 x 500 x 44 mm 17.4 x 19.7 x 1.73 inch
	Console w/ KVM	442 x 620 x 44 mm 17.4 x 24.4 x 1.73 inch	442 x 620 x 44 mm 17.4 x 24.4 x 1.73 inch
Packing (W x D x H)	Single console /	590 x 808 x 140 mm 23.2 x 31.8 x 5.5 inch	590 x 808 x 140 mm 23.2 x 31.8 x 5.5 inch
	Console w/ KVM		
Net weight	Single console	12.3 kg / 27.1 lb	12.5 kg / 27.5 lb
	Console w/ KVM	13.3 kg / 29.2 lb	13.5 kg / 29.7 lb
Gross weight	Single console	16.8 kg / 37 lb	17 kg / 37.4 lb
	Console w/ KVM	18.2 kg / 40 lb	18.4 kg / 40.5 lb

* All dimensions stated are subject to change if options are selected / integrated to base model part codes

Mounting Distance	N117	N119
Single console drawer	510 ~ 740 mm 20.1 ~ 29.1 inch	510 ~ 740 mm 20.1 ~ 29.1 inch
Console w/ KVM drawer	510 ~ 840 mm 20.1 ~ 33.1 inch	510 ~ 840 mm 20.1 ~ 33.1 inch


Compliance	
EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

N117 / N119 models w/ KVM

X stands for 17" or 19" LED-backlit LCD size.

2K KVM	IP	Remote	8-port
	0	0	N11X - 801D

2K KVM Cable



CH - 6D (6 ft)
DVI-D KVM cable




CH - 6H (6 ft)
HDMI KVM cable

Resolution: 16:9 - max. 2560 x 1440
Support **: 16:10 - max. 1920 x 1200
4:3 - max. 1600 x 1200

DVI-D KVM	IP	Remote	12-port
	0	0	N11X - 1201D

DVI-D USB KVM Cable


Resolution: 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200




CI - 6 (6 ft)
CI - 15 (15 ft)

Cat6 Matrix KVM	IP	Remote	8-port	16-port	32-port
	1	1	-	N11X - MUIP1613	N11X - MUIP3213
	2	1	-	N11X - MUIP1624	N11X - MUIP3224
	0	1	-	N11X - MU1602	N11X - MU3202
	0	2	-	N11X - MU1603	N11X - MU3203
	0	3	-	N11X - MU1604	N11X - MU3204


Cat6 KVM Dongle




DG - 100C
USB-C dongle




DG - 100P
DP - USB dongle



DG - 100H
HDMI - USB dongle



DG - 100SD
DVI - USB dongle




DG - 100S
VGA - USB dongle

Resolution: 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200


Cat6 Combo KVM	IP	Remote	8-port	16-port	32-port
	1	0	N11X - UIP802	N11X - UIP1602	N11X - UIP3202
	0	1	N11X - U802	N11X - U1602	N11X - U3202
	0	0	N11X - U801	N11X - U1601	N11X - U3201

DB-15 Combo KVM	IP	Remote	8-port	16-port
	1	0	N11X - IP802	N11X - IP1602
	0	1	N11X - 802	N11X - 1602
	0	0	N11X - S801	N11X - S1601


DB-15 VGA USB KVM Cable



CB - 6 (6 ft)




CB - 10 (10 ft)





CB - 15 (15 ft)

Resolution: 16:10 - max. 1920 x 1200
Support **: 16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

IP Console








High Performance KVM Access Over IP


Connector :	RJ45
User management :	1 x active user, 15-user login
Network protocol :	DHCP / BOOTP / DNS
Security :	TLS 1.3, AES, LDAP, Active Directory (AD), HTTP(s)
Browser :	Chrome, Firefox, Edge, etc.
Resolution :	16:9 - max. 1920 x 1080 / 16:10 - max. 1920 x 1200 / 4:3 - max. 1600 x 1200

Standard Keyboard



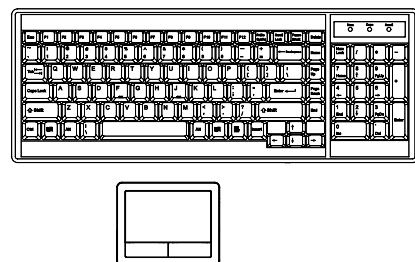



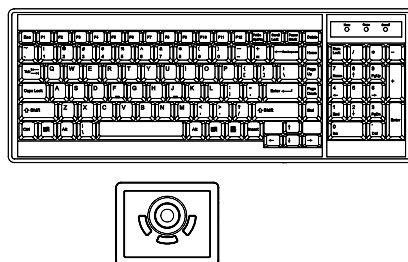


Ge G keyboard with touchpad



Gb G keyboard with trackball



Supporting layouts

America	 U.S.
EMEA	<div style="text-align: center;">  U.K. </div> <div style="text-align: center;">  Germany </div> <div style="text-align: center;">  France </div> <div style="text-align: center;">  Russia </div> <div style="text-align: center;">  Spain </div> <div style="text-align: center;">  Italy </div>
Asia	<div style="text-align: center;">  Japan </div> <div style="text-align: center;">  Korea </div>

Keyboard Options

* US layout only

Se S keyboard with touchpad

Sb S keyboard with trackball

